

Description

High load capacity flush fit expansion joint for use on industrial floors subject to slow moving traffic (cars, trucks, forklifts, trolleys etc).

Installed beneath the screed.

Materials:

Anodized aluminium 6063/T6. C

Supply Lengths:

4m, custom lengths can be produced against minimum order.


Load Capacity

Maximum Axle Load:

FHD-BS 50: 6 tons

FHD-BS 75: 5 tons

FHD-BS 100: 4 tons

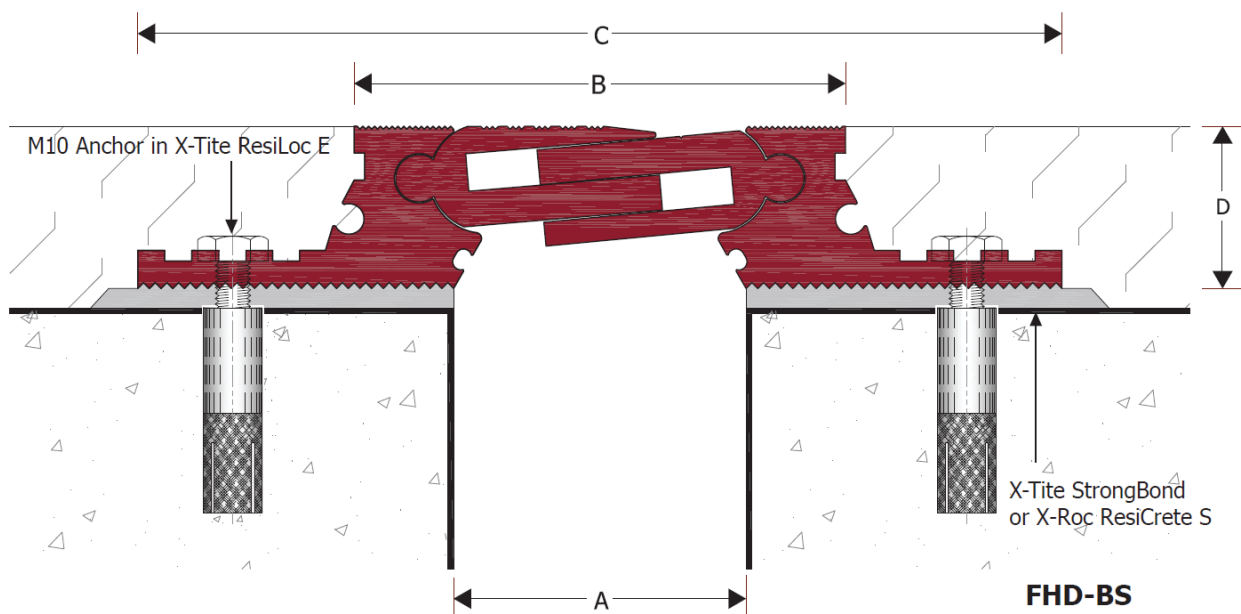

TYPE	A	B	C	D*	Total Movement
FLAT PROFILE					
FHD-BS 50 28	50	84	158	28	30
FHD-BS 75 75 119	75	119	195	30	40
FHD-BS 100 100	100	144	232	30	50

*Profile height "D" can be increased using X-Roc ResiCrete S or X-Tite Strong Bond.

Dimension in mm