

Description


High movement (seismic) anodised aluminium/ PVC wall joint for use with a wall finish up to 16mm thick. Joint must be fixed onto a concrete or masonry substrate.

Materials

Cover plate: Anodized aluminium 6063/T6
 Joint support: White aluminium (Powder coated RAL 9006)
 Joint Seals: UV Resistant PVC

Supply Lengths

Aluminium Profile: 4m
 Joint Seal: 25m roll
 Custom lengths can be produced to order

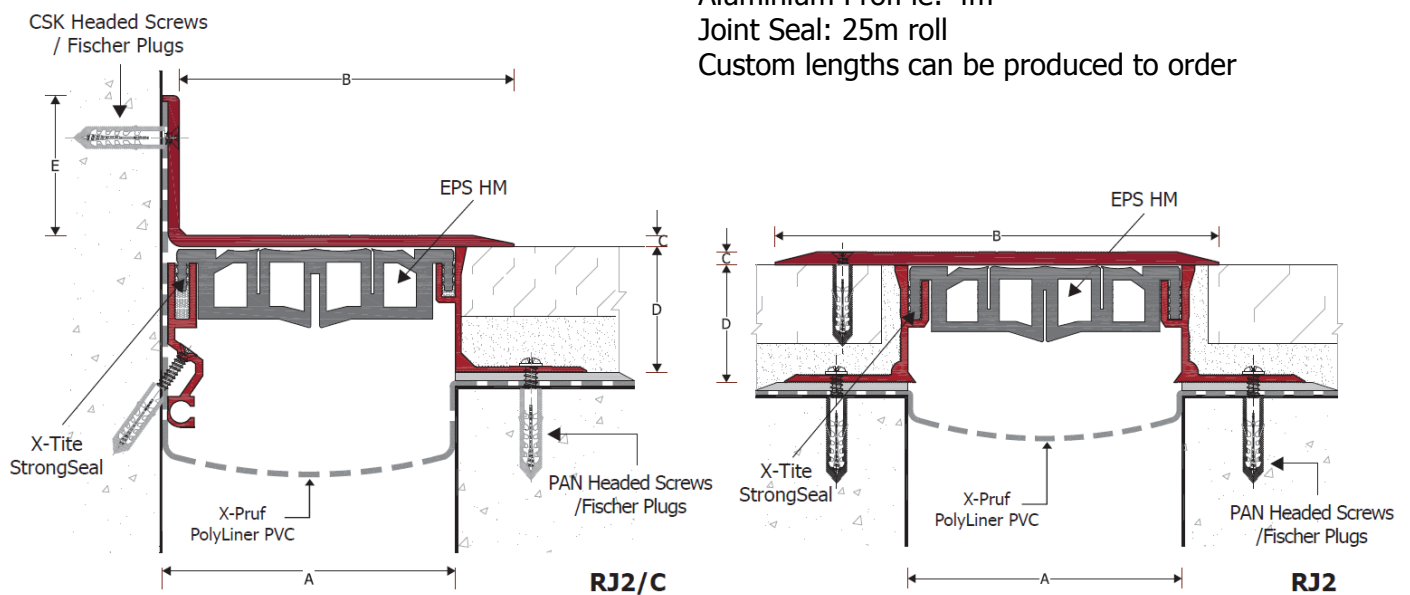

TYPE	A	B	C	D	E	*Total Movement
Flat Profile						
RJ2 50	50	117	4	45	-	70
RJ2 100	100	170	4	45	-	125
RJ2 150	150	219	4	45	-	180
RJ2 200	200	250	4	45	-	230
Corner Profile						
RJ2/C 10/15	50	70	4	45	50	60
RJ2/C 15/20	100	120	4	45	50	120
RJ2/C 20/30	150	169	4	45	50	200
RJ2/C 30/40	200	170	4	45	50	320

*Movements depend on the cover plate width

Dimension in mm