

Description


High movement (seismic) expansion joint covers for use in car parks and areas subject to vehicular traffic. Installed beneath the screed.

Materials:

Bases: Anodized aluminium 6063/T6
 Cover plates: Anodized aluminium 6063/T6
 Stainless Steel: Non-slip 304 or 316

Supply Lengths

Bases: 4m
 Cover plates: Aluminium: 4m
 Stainless steel: 2.4m
 Custom lengths can be produced against minimum order.

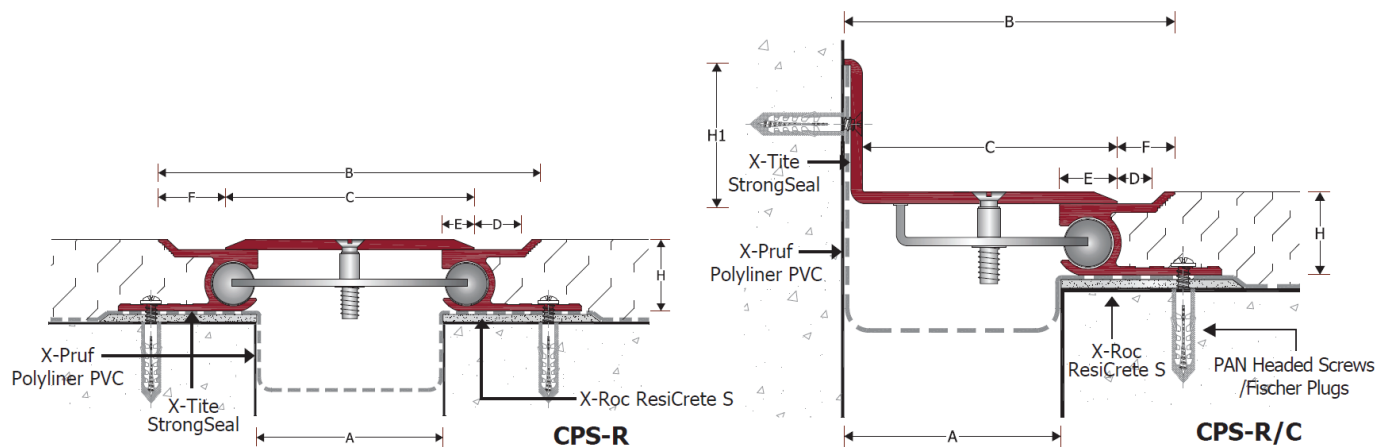

TYPE	A	B	C	D*	E*	F*	H	H1	Plate Thickness	Total Movement
Flat Profile										
CPS-R 50	50	129	80	16	15	24	29	-	3	±37
CPS-R 75	75	154	100	19	13	27	29	-	3	±50
CPS-R 100	100	179	150	6	25	14	29	-	4	±62
CPS-R 125	125	204	170	9	23	17	29	-	4	±75
CPS-R 150	150	229	200	6	25	14	29	-	6	±100
CPS-R 175	175	254	225	6	25	14	29	-	6	±175
CPS-R 200	200	279	250	6	25	27	29	-	9	±200
Corner Profile										
CPS-R/C 50	50	90	65	17	15	25	29	30	3	±32
CPS-R/C 75	75	115	88	19	11	27	29	30	3	±30
CPS-R/C 100	100	140	125	7	25	15	29	30	3	±32
CPS-R/C 125	125	165	148	9	23	17	29	30	3	±32
CPS-R/C 150	150	190	175	7	25	15	29	30	3	±32
CPS-R/C 175	175	215	200	7	25	15	29	30	3	±32
CPS-R/C 200	200	240	225	7	25	15	29	30	3	±32

Dimension in mm